

Test Pac 200-2

Pressure Test Unit




Haskel's Test Pac 200-2 is a portable, light-weight test rig designed for shop floor and on site pressure testing.

The unit is self contained and powered by compressed air.

Suited for use in most industries including;

- Oil & Gas
- Petrochemical
- Power Generation
- Automotive
- Paper
- Food Industry
- Defence
- Aerospace
- Ship Building

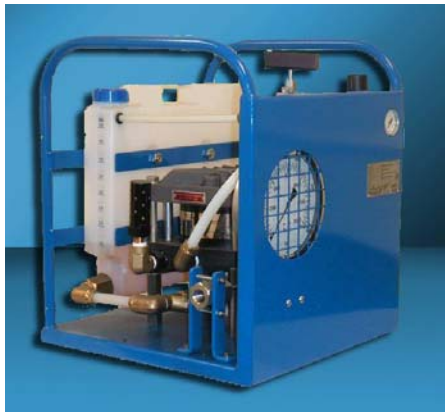

Haskel air driven liquid test pacs offer many advantages over conventional electrical driven power units.

- Ability to stall at any predetermined pressure and hold this fixed pressure without consuming power or generating heat.
- No heat, flame or risk of spark
- Infinitely variable cycling speed (flow rate)
- No limit or adverse effect to continuous stop/start applications
- Pump seals are self lubricated requiring no external air line lubricator
- Reliable, easy to maintain, compact and robust





Model Selection Chart – Based on 6 barg air drive available***

PUMP MODEL	PRESSURE RANGE*** Barg	FLOW CAPACITY Litres/min	FLUID SERVICE	MODEL ORDERING CODE
AW-25	25 - 170	7	Oil or 95/5	J24001-AW-25
AW-35	35 - 240	5	Oil or 95/5	J24001-AW-35
AW-60	60 - 410	2.5	Oil or 95/5	J24001-AW-60
AW-100	100 - 690	1.7	Oil or 95/5	J24001-AW-100
AW-150	150 – 990	1	Oil or 95/5	J24001-AW-150
HF-225	225 – 1550	0.75	Oil or 95/5	J24001-HF-225
HF-300	300 - 2070	0.6	Oil or 95/5	J24001-HF-300
ASF-25	25 - 170	7	Water or Oil	J24001-ASF-25
ASF-35	35 - 240	5	Water or Oil	J24001-ASF-35
ASF-60	60 - 410	2.5	Water or Oil	J24001-ASF-60
ASF-100	100 - 690	1.7	Water or Oil	J24001-ASF-100
ASF-150	150 – 990	1	Water or Oil	J24001-ASF-150
HSF-202	200-1380	1.5	Water or Oil	J24001-HSF-202
HSF-225	225 – 1550	0.75	Water or Oil	J24001-HSF-225
HSF-302	300-2070	0.9	Water or Oil	J24001-HSF-302
HSF-300	300 - 2070	0.6	Water or Oil	J24001-HSF-300

Description

The Test Pac 200-2 is a self-contained unit, which is supplied complete with the following

- Haskel air driven liquid pump
- Air controls comprising air filter, air pressure regulator, air gauge, on/off speed control valve and air exhaust silencer
- 5 litre Polypropylene transparent fluid reservoir with filler cap
- Suction strainer
- Outlet 6" dial pressure gauge, glycerine filled with stainless steel case
- Return to tank pressure release valve
- Fluid outlet connection located at edge of frame
- Mounted within a mild steel portable frame (see photo) painted Blue RAL 5017

Approx dimensions 410mm x 410mm x 480mm high

Approx Nett Weight 25 kgs

Options: Unit is available with Low Air Pressure Control feature and without fluid reservoir on request

Haskel Energy Systems Ltd

North Hylton Road, Sunderland. SR5 3JD. England

Tel: 00 44 (0) 191 549 1212. Fax: 00 44 (0) 191 549 0911, E-mail sales@haskel.co.uk Web: www.haskel.co.uk

Haskel International Inc.	Haskel France	Haskel Hochdrucksysteme	Haskel BV	Haskel Espana S.R.L.	Haskel Italiana S.R.L.
Industrial Technologies Division Tel : (1) 818 843-4000 Fax: (1) 818 844 291	Tel: (33) 03 20 04 66 00 Fax: (33) 03 20 33 31 95	Tel: (49) 281 984 800 Fax: 281 984 8020	Tel: (31) 79 36 18 472 Fax: (31) 79 36 00 560	Tel: (34) 943 474 566 Fax: (34) 943 451 186	Tel: (39) 0331 987 596 Fax: (39) 0331 987 597